


TYOLOGIES

FIXED

MONORAIL




BIRAIL




SLIDING

BIRAIL




TRIRAIL




SLIDING AND FIXED


BIRAIL



TRIRAIL




BIRAIL




SLIDING AND POCKET


BIRAIL



TRIRAIL




BIRAIL

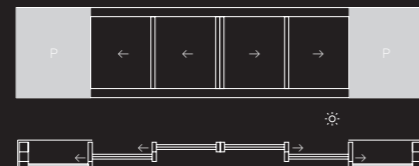


SLIDING CORNER

BIRAIL



SLIDING CORNER POCKET



TRIRAIL



A BYSTEEL FS BRAND

by
steel_{fs}

RUA DE PITANCINHOS, S/N
4711-911 PALMEIRA, BRAGA
(+351) 253 307 204
GERAL@LYRICAL-DESIGNWINDOWS.COM

INSTAGRAM.COM/ LYRICAL.DESIGNWINDOWS
LINKEDIN.COM/ LYRICAL-DESIGNWINDOWS
LYRICAL-DESIGNWINDOWS.COM

LYRICAL CODE

LYRICAL ODE II

GLASS
DOUBLE
INSULATION
UP TO 38 MM
CLIMATES
HYBRID

Experience evolution with the LYRICAL ODE II system, which combines all the advantages of the LYRICAL MUSE II system with tracks that are fully recessed into the threshold level. This system offers architecture solutions that provide seamless continuity between the interior and exterior, opening up the space without visible barriers. With easily removable profiles for maintaining the recessed tracks, it is designed to be a practical and aesthetically appealing solution for any project. Its modular structure allows the integration of hidden drainage systems, providing an even more personalised and comfortable user experience.



PERFORMANCE

THERMAL TRANSMITTANCE ($U_g = 1.0$)	$U_w = 1,28 \text{ W/m}^2\text{K}$ (EN 10077)
AIR PERMEABILITY	CLASS 4 (EN 12207)
WATER TIGHTNESS	E750 (EN 12208)
WIND LOAD RESISTANCE (Standard interlock)	A5 (EN 12210)
SOUND INSULATION	$R_w 41 \text{ dB}$ (EN ISO 717-1)
SECURITY	RC2 / WK2 (EN 1628, 1629, 1630)

LYRICAL ODE III

GLASS
TRIPLE
INSULATION
UP TO 52 MM
CLIMATES
COLD

Discover LYRICAL ODE III, the evolution of the LYRICAL MUSE III system. Compatible with glass up to 52 mm, it maintains the benefits of hyper-insulated triple glazing, but stands out for its more versatile structure and fully concealed threshold profile. It integrates seamlessly with automation and climate control glass, offering comfort and personalisation. With advanced technology and high-end design, LYRICAL ODE III is the future of residential glazing that demands high performance.



PERFORMANCE

THERMAL TRANSMITTANCE ($U_g = 0.5$)	$U_w = 0,78 \text{ W/m}^2\text{K}$ (EN 10077)
AIR PERMEABILITY	CLASS 4 (EN 12207)
WATER TIGHTNESS	E750 (EN 12208)
WIND LOAD RESISTANCE (Standard interlock)	A5 (EN 12210)
SOUND INSULATION	$R_w 44 \text{ dB}$ (EN ISO 717-1)
SECURITY	RC2 / WK2 (EN 1628, 1629, 1630)

